

06-23-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
 Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U. S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 22-0125

First Inventor or Application Identifier Scott A. Cooper

Title DOWNLINK BEAM HOPPING WAVEFORM

Express Mail Label No. EK432677156US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 40] 1
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 8] 1
4. Oath or Declaration [Total Pages] 1
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☒ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: Copy of Unsigned Declaration

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____

Prior application information: Examiner _____

Group / Art Unit _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Michael S. Yatsko				
	TRW Inc.				
Address	Law Dept.				
	One Space Park, Bldg. E2/6051				
City	Redondo Beach	State	CA	Zip Code	90245
Country	U.S.A.	Telephone	310-812-4910	Fax	310-812-2687

Name (Print/Type)	Michael Yatsko	Registration No. (Attorney/Agent)	28,135
Signature	<i>Michael S. Yatsko</i>	Date	6/21/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Express Mail Mailing Label No. 06/21/00

Date of Deposit _____
 I hereby certify that this paper or fee is being
 deposited with the United States Postal Service
 "Express Mail Post Office to Addressee" service
 under 37 CFR 1.10 on the date indicated above
 and is addressed to the Commissioner of Patents
 and Trademarks, Washington, D.C., 20231.

TRW Docket No. 22-0125

DOWNLINK BEAM HOPPING WAVEFORM

Mailing (Print)
 Mailing (Signature)

Lorna L. Schott
 Lorna L. Schott

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is related to TRW Docket No. 22-
 0067, titled "Downlink Transmission and Reception
 5 Techniques for a Processing Communication Satellite"
 filed _____ as serial No. _____.

BACKGROUND OF THE INVENTION

The present invention relates to satellite
 communication system downlink waveform structures. In
 10 particular, the present invention relates to an
 efficient satellite downlink waveform including
 multiple payloads per downlink frame which may be
 implemented using a hopping beam.

Satellites produce spot beam downlinks that
 15 communicate information in time division multiplexed
 (TDM) frames. In general, the frames include an
 overhead section and a payload section. The overhead
 section includes, for example, a guard band and
 synchronization bits while the payload section carries
 20 the "billable" or "useful" data bits. Every time the
 TDM downlink delivers a payload section in a new

frame, the overhead section is retransmitted. Thus, reducing the ratio of overhead to billable data provides an opportunity for increasing the net revenue.

5 In general, these beams may be hopped in time such that any particular downlink beam may illuminate different geographical spots on the ground, called cells, at any particular time. Such hopping beams permit a single beam to provide broader geographical
10 coverage with a single satellite transmitter chain, saving spacecraft size and weight.

For hopping beams, each beam hop must start with a retransmission of the synchronization sequence. However, any transmission of overhead information
15 necessarily reduces useful data throughput. Such repetition is particularly undesirable in satellite communications, where bandwidth is extremely valuable and useful data throughput is critical to profitability.

20 In addition to reducing the useful information throughput, the duration of the overhead information represents a hard limit on the minimum delay between delivery of payload sections. In other words,

delivery of data that must be split across payload sections in multiple frames incurs an additional delivery delay for every frame. Thus, large messages or data transfers invariably incur significant
5 delivery delays according to the number of frames over which the message or data is distributed.

An additional issue arises for hopping beams in which the hopping pattern is influenced by the traffic
10 demands. Since the hopping pattern may not be fixed, the ground terminal would need some knowledge of the hopping sequence in order to know which transmissions contain payloads destined for that terminal. One such method would be for a network controller to broadcast
15 hop sequences to all terminals, but this entails significant overhead and control. Another approach would be to require each terminal to estimate received downlink power and process those TDMA hops for which the measured power exceeds some threshold. This
20 method has the disadvantage in that terminals at ground cell boundaries may experience very small differences in received power between hops directed to it and hops directed to the adjacent ground cells.

A need exists in the industry for a downlink frame format that addresses the problems noted above and others previously experienced.

BRIEF SUMMARY OF THE INVENTION

5 A preferred embodiment of the present invention provides a downlink waveform for communicating payloads of data in a time division multiplexed frame stream. The frame signal includes a first payload field and a first header field with a first frame type
10 indicator. The frame signal also includes a second payload field and a second header field smaller than the first header field that includes a second frame type indicator. The first payload field, first header field, second payload field, and the second header
15 field are encapsulated in a single frame to provide a multiple payload frame with reduced overhead compared to individually transmitted single payload frames.

As will be explained in detail below, the first header field may include a hopping beam guard band
20 with a duration encompassing circuit switching delay to hop a downlink beam between geographical areas, a masterframe count, a subframe count, a pseudorandom noise synchronization code, and a payload type

indicator. The first and second payloads may be scrambled according to a pseudorandom noise scrambling sequence. The frame signal may be extended to N payloads with N header fields in a single frame that
5 incurs less overhead than N separately transmitted frames carrying a single payload.

A preferred embodiment of the present invention also provides a method for transmitting a communication frame. The method steps include
10 transmitting a first header field including a first frame type indicator and a first payload field. The method continues by transmitting a second header field smaller than the first header field and including a second frame type indicator followed by a second
15 payload field. As noted above, the first payload field, first header field, second payload field, and the second header field are encapsulated in a single frame.

In another preferred embodiment of the present
20 invention, a downlink frame processing module forms the frames. The downlink frame processing module includes an outer coder, an inner coder coupled to the outer coder, and a downlink frame organizer. The

downlink frame organizer packages overhead data and coded data produced by the outer coder and inner coder sequence into a single frame as described above.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Figure 1 illustrates an exemplary multiple payload frame signal.

Figure 2 depicts a method for transmitting information to form a multiple payload frame.

10 Figure 3 shows a pseudorandom noise scrambling sequence generator.

Figure 4 shows a pseudorandom noise synchronization sequence generator.

Figure 5 illustrates a downlink frame processing module.

15 Figure 6 shows an implementation of a downlink hopping waveform transmission system.

Figure 7 illustrates an implementation of a light convolutional encoder.

Figure 8 shows an implementation of a heavy convolutional encoder.

DETAILED DESCRIPTION OF THE INVENTION

Turning now to Figure 1, that figure illustrates a multiple payload frame signal 100. The frame 100 includes a first header field 102 followed by a first payload field 104 and a first flush field 106. In addition, the frame format 100 includes a second header field 108 followed by a second payload field 110 and another flush field 112. The first header field 102, first payload field 104, first flush field 106, second header field 108, second payload field 110, and second flush field 112 are all encapsulated into the single frame 100.

Continuing with reference to Figure 1, the first header field 102 is composed of several subfields. In particular, the first header field 102 includes a hopping beam guard band 114, a first payload pseudorandom noise (PN) synchronization field 116, and a spare field 118. The first header field 102 also includes a first frame type field 120, a masterframe count field 122, and a subframe count field 124.

The second header section includes a smaller set of subfields, namely, the second PN synchronization field 126 and the second frame type field 128.

Table 1, below, shows the preferred length and modulation of each field. Symbols are preferably transmitted at 196.7 megasymbols per second.

Table 1		
Field	Symbols	Modulation
first header 102	368	
hopping beam guard band 114	114	BPSK
first payload PN synch 116	64	BPSK
spare 118	62	BPSK
first frame type 120	32	BPSK
masterframe count 122	32	BPSK
subframe count 124	64	BPSK
first payload 104	7552	QPSK
first flush 106	16	QPSK
second header 108	96	
second payload PN synch 126	64	BPSK
second frame type 128	32	BPSK
second payload 110	7552	QPSK
second flush 112	16	QPSK
TOTAL LENGTH	15600	

The hopping beam guard band 114 provides, in the preferred embodiment, approximately 580 ns of guard time. In general, however, the length of the hopping

beam guard band 114 is selected to encompasses an expected circuit switching downlink beam hopping delay. The downlink beam hopping delay represents a worst case estimate of the amount of time that the
5 satellite needs to redirect a downlink beam (i.e., "hop" the beam) to a different geographic area.

The first PN synchronization field 116 and the second PN synchronization field provide synchronization bits for earth terminals. As will be
10 explained in more detail below, a single PN synchronization sequence generator is used to provide an identical PN sequence for both PN synchronization fields 116, 118. The subframe count field 124 counts individual frames as they are transmitted.
15 Preferably, the subframe count field 124 includes a 16 bit downlink frame count appended with 8 zeros and convolutionally encoded with a relatively heavy (e.g., 3/8 rate) code. When the subframe count field 124 reaches 9328, for example, the masterframe count field
20 122 increments. The masterframe count rolls over after reaching its maximum value (0xFFFFFFFF), although it may be reset or preprogrammed at any time.

The spare field 118 may be drawn from to provide subsequent enhancements to the frame 100 (e.g., additional synchronization bits). Preferably, the spare field 118, the hopping beam guard band 114, and first PN synchronization field 116 are filled with PN bits that are generated by a PN synchronization sequence generator discussed below.

The first frame type field 120 generally indicates characteristics of the first payload field 104, while the second frame type field 128 generally indicates characteristics of the second payload field 110. The frame type field may be coded using a rate 1/2 block code, such as an (8, 4) Reed-Muller code. Several examples of codes for the first and second frame type fields 120, 128 are illustrated below in Table 2.

Table 2		
Frame Type	Uncoded Value	Coded Value
Light Coding	110	00111100
Heavy Coding	011	10010110
Frame Gate	001	10100101

Power Gate	000	11110000
------------	-----	----------

Although the light coding, heavy coding, and power gating options are with reference to a payload itself, the frame gate option indicates power gating of an entire frame (i.e., all 15600 symbols). Each coded value is preferably repeated four times in the frame type field. For example, a frame type of 00111100 00111100 00111100 00111100 in the first frame type field 120 indicates that the first payload field 104 is lightly coded. As another example, a frame type of 11110000 11110000 11110000 11110000 in the second frame type field 128 indicates that the second payload field 110 will be power gated. When a frame or payload field is power gated, only a small fraction of the ordinary output power will be generated in the downlink beam during for the entire frame, or during the identified payload(s).

With regard to the heavy coding and light coding, as examples, a lightly coded payload may indicate 3/4 rate, constraint length 7, punctured convolutional coding of 1416 Reed-Solomon block coded bytes. A heavily coded payload may indicate a 3/8 rate,

constraint length 7, punctured convolutional coding of 708 Reed-Solomon block coded bytes. Thus, the first and second payload fields remain the same size (7552 symbols) under both coding rates.

5 The first and second payload fields 104, 110 carry the "useful" data to the earth terminals. The first and second payload fields 104, 110 are typically concatenated coded using an inner convolutional code. The first and second flush fields 106, 112 are
10 provided as a means to flush the last of the "useful" data bits from the spacecraft convolutional encoders, providing the earth terminal convolutional decoders opportunity to successfully decode the entire burst.

 The frame signal 100 delivers multiple payloads
15 (in the preferred embodiment, two payloads) in a single frame. Although a first header field 102 is provided as well as a second header field 108, the second header field 108 is smaller than the first header field 102. In particular, the second header
20 field does not repeat the hopping beam guard band 114 (since the receiver(s) for the first and second payload fields 104, 110 are in the same beam spot for the current hop location), spare field 118,

masterframe count 122 and subframe count 124 (since only one count is needed for the single multiple payload frame).

As a result, the frame 100 delivers two payloads in a single frame with less overhead than would be incurred by transmitting two single payload frames. Throughput is therefore higher. The specific frame format 100 shown in Figure 1 may be generalized to a single N payload N header frame, under the general condition that the sum of the overhead arising from the N headers is less than the sum of the overhead arising from N individual single payload frames.

In a typical implementation, multiple frames may be grouped into a master frame. This permits allocation of system resources and scheduling of system events on a longer time scale, if desired. In the preferred embodiment, 9328 frames make up a master frame.

Turning now to Figure 2, that figure summarizes a method 200 for transmitting a multiple payload frame. The method includes outer coding 202 payload data with a Reed-Solomon code, interleaving 204 the data, scrambling 206 the data, and inner coding 208

the data with a rate $3/4$ or $3/8$ rate convolutional code. While the multiple payload frame 100 does not necessarily require any coding, scrambling, or interleaving, the payload data is preferably thus

5 conditioned for reliable transmission in the frame 100.

A preferred form of the interleaving tables is presented below. Table 3 shows the manner in which the interleaving table is filled with lightly coded

10 payload bytes, while Table 4 shows the manner in which QPSK I and Q bits are read out of that interleaving table. Similarly, Table 5 shows the manner in which the interleaving table is filled with heavily coded

15 payload bytes, while Table 6 shows the manner in which QPSK I and Q bits are read out of that interleaving table.

Table 3 - Byte Input (Light)							
	Col 0	Col 1	Col 2	Col 3	...	Col 234	Col 235
Row 0	0	1	2	3	...	234	235
Row 1	236	237	238	239	...	470	471
Row 2	472	473	474	475	...	706	707

Row 3	708	709	710	711	...	942	943
Row 4	944	945	946	947	...	1178	1179
Row 5	1180	1181	1182	1183	...	1414	1415

Table 4 - I & Q Output (Light)

	Col 0	Col 1	Col 2	Col 3	...	Col 234	Col 235
Row 0	I0	Q0	I6	Q6	...	I702	Q702
Row 1	I1	Q1	I7	Q7	...	I703	Q703
Row 2	I2	Q2	I8	Q8	...	I704	Q704
Row 3	I3	Q3	I9	Q9	...	I705	Q705
Row 4	I4	Q4	I10	Q10	...	I706	Q706
Row 5	I5	Q5	I11	Q11	...	I707	Q707

Table 5 - Byte Input (Heavy)

	Col 0	Col 1	Col 2	Col 3	...	Col 234	Col 235
Row 0	0	1	2	3	...	234	235
Row 1	236	237	238	239	...	470	471
Row 2	472	473	474	475	...	706	707

Table 6 - I & Q Output (Heavy)							
	Col 0	Col 1	Col 2	Col 3	...	Col 234	Col 235
Row 0	I0	Q0	I3	Q3	...	I351	Q351
Row 1	I1	Q1	I4	Q4	...	I352	Q352
Row 2	I2	Q2	I5	Q5	...	I353	Q353

Continuing with reference to Figure 2, the method 200 transmits 210 the first header field 102, transmits 212 the first payload field 104, and transmits 214 the first flush bits. Subsequently, the method 200 transmits 216 the second header field 108, transmits 218 the second payload field 110, and transmits 220 the second payload flush field 112. As noted above, each of the fields are encapsulated into a single downlink frame. Thus, after the second payload flush field 112 is transmitted, the system prepares and sends the next multiple payload frame, starting at step 202.

Turning now to Figure 3, that figure illustrates a preferred embodiment of a PN scrambling sequence generator 300. The generator 300 includes a serially connected set of shift registers (e.g., the shift

registers 302, 304, 306, and 308). The output of registers 302-308 are input to an XOR gate 310 which produces PN bits on the pseudorandom noise scrambling sequence output 312. The sequence output 312 connects
 5 to the Q bit XOR gate 314 as well as the I bit XOR gate 316. Thus, payload data pulled out of the interleaving tables as I and Q bits presented in scrambled form on the scrambled Q output 318 and the scrambled I output 320.

10 The PN bits on the scrambling sequence output 312, as illustrated in Figure 3, correspond to the generator polynomial $x^{16} + x^{15} + x^{13} + x^4 + 1$. Other generator polynomials may be used, however. In general, the scrambling sequence generator 300 is
 15 preloaded at the beginning of each frame 100 to an initial state. The initial state may vary from frame to frame, for example, based on the current downlink beam hop location. In addition, the sequential state may be varied from masterframe to masterframe in a
 20 sequence defined by an algorithm controlled by a key. Varying the initial state provides a means to limit system access only to authorized user terminals, i.e., those terminals with the current keys. Note also that

when no scrambling is desired, the scrambling sequence generator 300 may be preloaded with zeros.

As noted above, the first and second payload PN synchronization fields 116, 126 provide the ground terminal with a synchronization reference. Figure 4 shows a Gold Code PN synchronization sequence generator 400 that may be used to generate the PN synchronization bits. The sequence generator 400 includes a first PN code generator 402 and a second PN code generator 404. The first PN code generator 402 implements the polynomial $1 + X + X^6$, while the second PN code generator 404 implements the polynomial $1 + X + X^3 + X^4 + X^6$. The outputs of the first and second PN code generators 402, 404 are coupled to the XOR gate 406 which produces PN bits on the PN synchronization sequence output 408.

As with the scrambling sequence generator 300, the PN synchronization sequence generator 400 may be preloaded at the beginning of each frame 100 to an initial state. The initial state may vary from frame to frame, for example, based on the current downlink beam hop location. Additionally, the first PN code generator 402 may be seeded independently of the

second PN code generator 404. Either or both the first and second PN code generators 402, 404 may be used to provide a particular PN bit output when the downlink beam hops to a first location, and a second

5 PN bit output when the downlink hops to a second location. In the preferred approach, the spacecraft would be programmed to provide orthogonal sequences in frames destined to different hops. The embodiment of the sequence generators 402 and 404 provides for a

10 multitude of possible sequences. Such an approach permits the earth terminals to correlate on the synchronization pattern and to compare the correlated value against a threshold to determine whether a downlink hop is intended for that earth terminal.

15 Using orthogonal synchronization sequences maximizes the difference between correlation results between even and odd downlink hops, and resolves the aforementioned ambiguity which results from a terminal being situated on hop boundaries. Using orthogonal

20 synchronization sequences permits the network to adaptively alter the hopping pattern to reflect traffic demands without complex coordination. An adaptive hopping pattern permits a higher downlink efficiency.

Preferably, the sequence generator 400 runs during, and provides PN bits for, the guard band 114, first payload PN synchronization field 116, and the spare field 118. The sequence generator 400 is then

5 halted until PN bits are needed for the second payload synchronization field 126, at which time the sequence generator 400 continues. Once the sequence generator 400 generates the PN bits for the second payload synchronization field 126, the sequence generator 400

10 is halted until the next frame. The PN bits for the guard band 114 and the spare field 118 ensure that the power spectral density after modulation and transmission, is within acceptable limits.

Note that as illustrated, the period of the

15 sequence generator 400 is 63. Note also that 126 BPSK symbols or 126 bits separate the first payload PN synchronization field 116 and the second payload synchronization field 126 (from the point of view of the sequence generator 400). Thus, the sequence

20 generator 400 provides PN bits in the second payload PN synchronization field 126 that are identical to the PN bits provided for the first payload PN

synchronization field 116 because it continues to run over the spare field 118.

A single PN sequence generator 400 thereby provides the ground terminals with multiple
5 opportunities to acquire synchronization from a single frame. Only a single seed need be provided on the satellite and on the ground (although additional seeds may be used if desired). An additional benefit is that the earth terminals can distinguish one frame
10 from the next, as the boundaries of each frame will encompass two identical PN synchronization fields. Furthermore, although the downlink beam may hop between two geographic locations (and thereby be absent from a cell for an entire frame time), twice as
15 many synchronization fields are provided. In other words, the average time between synchronization opportunities is the same as with a single header and payload non-hopping downlink beam.

Turning next to Figure 5, that figure illustrates
20 a downlink frame processing module 500 that produces the frame 100. The processing module 500 includes a data memory 502, an outer coder 504, and an interleaver 506. The processing module 500 also

includes a scrambler 508, an I convolutional encoder 510 and corresponding Q convolutional encoder 512, and a downlink frame organizer 514. A data and control bus 516 provides signals that control the operation of the processing module 500, including, for example, selection of convolutional encoder rates and provision of frame overhead information (e.g., frame type) for the downlink frame organizer 514.

The data memory 502 preferably stores 53 byte ATM cells. However, any particular data format may be used to supply the outer coder 504 (e.g., a Reed-Solomon encoder) with data. The interleaver 506, which accepts outer coded data, operates as shown above in Tables 3-6 to interleave the data bits and reduce the detrimental effects of burst errors that may occur after transmission.

After the processing module 500 reads I and Q data bits out of the interleaver 506, the I and Q data bits are scrambled in the scrambler 508. The scrambler 508 may be implemented as illustrated in Figure 3 and described above. The processing module 500 then convolutionally encodes the scrambled I and Q data bits and presents the coded data to the downlink

frame organizer 514 on the coded data outputs 518,
520.

The downlink frame organizer 514 packages the
coded data into the frame 100 according to the format
5 shown in Figure 1. In addition, the downlink frame
organizer 502 may also maintain internally, or receive
over the control and data bus 516, the masterframe
count and subframe count. Similarly, the downlink
frame organizer 514 may accept the coded first and
10 second frame types for packaging into the frame 100.
The downlink frame organizer 514, as it builds the
frame 100, passes frame bits to an RF modulator, e.g.,
a QPSK or staggered QPSK modulator (not shown), that
creates the frame waveform for amplification and
15 transmission.

With regard to Figure 6, a more specific
implementation of a downlink hopping waveform
transmission system 600 is shown. The transmission
system 600 includes a data scheduler 602, a data
20 router 604, and a waveform processing chain including
a QPSK modulator 606, an upconverter 608, and a
traveling wave tube amplifier (TWTA) 610. A ferrite
switch 612 directs the waveform to be transmitted

through either the first feed path 601 or the second feed path 603.

Figure 6 also shows a control output 616 (that may be used to carry, as examples, a power gating signal and a beam hopping selection signal), two frequency selection inputs 618 and 620 for the modulator 606, a feed path selection input 622, and an intermediate waveform output 624 from the modulator. Preferably, additional ferrite switches 626 and 628 in the feed paths 601, 603 provide additional signal isolation (e.g., approximately 20dB between input and output when the ferrite switch is off). In other words, the additional ferrite switches 601, 603 operate in response to the control output 616 to pass or block a waveform to be transmitted through the feed paths 601, 603. For example, if the RF waveform is destined for the feed path 601, then the ferrite switch 628 is switched to the ground load 632. If the RF waveform is destined for the feed path 603, then the ferrite switch 626 is switched to the ground load 630.

During operation, the transmission system 600 accepts baseband data from the router 604 (e.g., an

ATM cell router), and creates a waveform to be transmitted using the waveform processing chain. The waveform processing starts by directly converting baseband I and Q data to an intermediate frequency of, for example, 750 MHz. The waveform processing then selects one of F1 (e.g., 3.175 MHz) and F2 (e.g., 3.425) and one of F3 (e.g., 16 GHz) and F4 (e.g., 17.4 GHz) to produce a waveform to be transmitted with a final center frequency at one of 18.425 GHz, 18.675 GHz, 19.825 GHz, and 20.075 GHz. The scheduler 602 monitors the propagation of data through the waveform processing chain and determines when certain frame signals should be power gated. To that end, the scheduler 602 provides a power gating signal on the control output 616 that is active when power gating is to occur.

The TWTA 610 amplifies the waveform to be transmitted, while the switch 612 determines along which feed path 601-603 (or additional feed paths) the amplified waveform will propagate. For this reason, the switch 612 includes the feed path selection input 622 responsive to information on the control output 616. Because the feed paths 601-603 are generally

(though not necessarily) associated with feed horns that produce spot beams in geographically distinct terrestrial cells, the feed path selection input 622 acts to determine the hop location of the downlink waveform. Thus, the downlink manifests itself as a beam spot that, typically, provides bandwidth for multiple terrestrial cells by hopping between them.

Turning next to Figure 7, that figure illustrates a light coding convolutional encoder 700. The convolutional encoder 700 provides a $3/4$ rate, constraint length 7 convolutional code with a puncturing pattern of $|g_0|g_1|g_1g_0|$ read right to left, where " $|$ " delimits bit input epochs. The modulo two adders G0 and G1, and shift register 702 implement:

$$C01 = B1 + S5 + S4 + S3 + S0$$

$$C11 = B1 + S4 + S3 + S1 + S0$$

$$C12 = B2 + S5 + S4 + S2 + S1$$

$$C03 = B3 + B2 + B1 + S5 + S2$$

With generators $G0 = [1111001]$ and $G1 = [1011011]$.

With regard to Figure 8, that figure illustrates a heavy coding convolutional encoder 800. The convolutional encoder 800 provides a $3/8$ rate, constraint length 7 convolutional code with a puncturing pattern of $|g_1g_0|g_2g_1g_0|g_2g_1g_0|$ read right to left, where " $|$ " delimits bit input epochs. The modulo two adders G_0 , G_1 , G_2 , and shift register 802 implement:

$$\begin{aligned}
 C_{01} &= B_1 + S_5 + S_4 + S_3 + S_0 \\
 10 \quad C_{11} &= B_1 + S_4 + S_3 + S_1 + S_0 \\
 C_{21} &= B_1 + S_5 + S_4 + S_2 + S_0 \\
 C_{02} &= B_2 + B_1 + S_5 + S_4 + S_1 \\
 C_{22} &= B_2 + B_1 + S_5 + S_3 + S_1 \\
 C_{03} &= B_3 + B_2 + B_1 + S_5 + S_2 \\
 15 \quad C_{13} &= B_3 + B_1 + S_5 + S_3 + S_2
 \end{aligned}$$

With generators $G_0 = [1111001]$ $G_1 = (1011011)$, $G_2 = [1110101]$.

While the invention has been described with reference to preferred embodiments, those skilled in the art will understand that various changes may be

What is claimed is:

1 1. A frame signal for communicating payloads of
2 data in a time division multiplexed frame stream, the
3 frame signal comprising:

4 a first header field including a first frame type
5 field;

6 a first payload field;

7 a second header field smaller than the first
8 header field and including a second frame type field;
9 and

10 a second payload field;

11 wherein the first payload field, first header
12 field, second payload field, and the second header
13 field encapsulated in a single frame.

1 2. The frame signal of claim 1, wherein the
2 first header field further includes a hopping beam
3 guard band having a duration encompassing an expected
4 circuit switching downlink beam hopping delay.

1 3. The frame signal of claim 1, wherein the
2 first header field includes a first pseudorandom noise
3 synchronization field.

1 4. The frame signal of claim 3, wherein the
2 second header field includes a second pseudorandom
3 noise synchronization field.

1 5. The frame signal of claim 4, wherein the
2 first and second pseudorandom noise synchronization
3 fields carry identical pseudorandom noise
4 synchronization codes.

1 6. The frame signal of claim 1, wherein the
2 first payload field carries first data scrambled by a
3 pseudorandom noise scrambling sequence.

1 7. The frame signal of claim 6, wherein the
2 second payload field carries second data scrambled by
3 a pseudorandom noise scrambling sequence.

1 8. The frame signal of claim 1, wherein the
2 first frame type field carries at least one of a
3 coding identifier and a power gating identifier.

1 9. The frame signal of claim 8, wherein the
2 coding identifier specifies one of a heavy or light
3 coding for first payload field.

1 10. The frame signal of claim 8, wherein the
2 power gating indicator specifies one of a first
3 payload power gate and a frame power gate.

1 11. The frame signal of claim 8, wherein the
2 second frame type field carries at least one of a
3 second coding identifier and a second power gating
4 identifier.

1 12. The frame signal of claim 11, wherein the
2 second coding identifier specifies one of a heavy or
3 light coding for second payload field.

1 13. The frame signal of claim 11, wherein the
2 second power gating indicator specifies one of a
3 second payload power gate and a frame power gate.

1 14. The frame signal of claim 1, wherein the
2 first header field further includes a masterframe
3 count field, and a subframe count field.

1 15. The frame signal of claim 1, further
2 comprising at least one additional header field and at
3 least one additional payload field, the at least one
4 additional header field smaller than the first header
5 field.

1 16. A method for transmitting a communication
2 frame, the method comprising:

3 transmitting a first header field including a
4 first frame type field;

5 transmitting a first payload field;

6 transmitting a second header field smaller than
7 the first header field and including a second frame
8 type field,

9 transmitting a second payload field; and

10 the first payload field, first header field,
11 second payload field, and the second header field
12 encapsulated in a single frame.

1 17. The method of claim 16, wherein transmitting
2 the first header field further comprises transmitting

3 a hopping beam guard band have a duration encompassing
4 an expected circuit switch downlink beam hopping
5 delay.

1 13. The method of claim 16, wherein transmitting
2 the first header field comprises transmitting a first
3 pseudorandom noise synchronization field, wherein
4 transmitting the second header field comprises
5 transmitting a second pseudorandom noise
6 synchronization field, and wherein the first and
7 second pseudorandom noise synchronization fields carry
8 identical pseudorandom noise synchronization codes.

1 19. The method of claim 16, wherein transmitting
2 the first header field further comprises transmitting
3 at least one of a first payload coding identifier and
4 a first payload power gating identifier in the first
5 payload field type indicator, and wherein transmitting
6 the second header field further comprises further
7 comprises transmitting at least one of a second
8 payload coding identifier and a second payload power
9 gating identifier in the second payload field type
10 indicator.

1 20. The method of claim 19, wherein transmitting
2 the first payload coding identifier comprises
3 transmitting one of a heavy or light coding
4 identifier, and wherein transmitting the second
5 payload coding identifier comprises transmitting one
6 of a heavy or light coding identifier.

1 21. The method of claim 20, wherein transmitting
2 the first payload power gating identifier comprises
3 transmitting one of a first payload power gate
4 identifier and a frame power gate identifier, and
5 wherein transmitting the second payload power gating
6 identifier comprises transmitting one of a second
7 payload power gate identifier and the frame power gate
8 identifier.

1 22. A downlink frame processing module
2 comprising:

3 an outer coder;

4 an inner coder coupled to the outer coder, the
5 inner coder including a coded data output; and

6 a downlink frame organizer connected to the coded
7 data output, wherein the downlink frame organizer
8 packages coded data present on the coded data output
9 into a single frame including:

10 a first payload field;

11 a first header field including a first frame type
12 field;

13 a second payload field; and

14 a second header field smaller than the first
15 header field and including a second frame type field.

1 23. The downlink frame processing module of
2 claim 22, further comprising a scrambler coupled to
3 the inner coder and the outer coder.

1 24. The downlink frame processing module of
2 claim 22, wherein the outer coder is a Reed-Solomon
3 encoder and the inner coder is a Convolutional
4 encoder.

1 25. The downlink frame processing module of
2 claim 22, wherein the first header field further

3 includes a hopping beam guard band have a duration
4 encompassing an expected circuit switching beam
5 hopping delay.

1 26. The downlink frame processing module of
2 claim 22, wherein the first header field and the
3 second header field include an identical pseudorandom
4 noise synchronization code.

1 27. The downlink frame processing module of
2 claim 22, wherein the first payload field type
3 indicator includes at least one of a coding identifier
4 and a power gating identifier.

1 28. The downlink frame processing module of
2 claim 27, further comprising a data memory coupled to
3 the outer coder.

1 29. The downlink frame processing module of
2 claim 28, where the data memory stores 53 bytes ATM
3 cells.

1 30. A communication signal comprising:

2 368 Binary Phase Shift Keyed (BPSK) first header
3 symbols followed by 7552 Quadrature Phase Shift Keyed

4 (QPSK) first payload symbols, followed by 16 QPSK
5 flush symbols, followed by 96 BPSK second header
6 symbols, followed by 7552 QPSK second payload symbols,
7 followed by 16 QPSK flush symbols.

1 31. The communication signal of claim 30,
2 wherein the first header comprises 114 guard band
3 symbols, 64 first pseudorandom noise synchronization
4 symbols, 32 first frame type symbols, 32 masterframe
5 count symbols, and 64 subframe count symbols, and
6 wherein the second header comprises 64 second
7 pseudorandom noise synchronization symbols and 32
8 second frame type symbols.

1 32. The communication signal of claim 31,
2 wherein the first and second payload symbols are
3 concatenated coded using a Reed Solomon outer code and
4 one of a $3/8$ rate and $3/4$ rate convolutional code,
5 interleaved, and scrambled according to a pseudorandom
6 noise scrambling sequence.

1 33. The communication signal of claim 31,
2 transmitted at a rate of 196.7 megasymbols per second.

1 34. A method for transmitting a communication
2 frame, the method comprising:

3 transmitting in order 368 Binary Phase Shift
4 Keyed (BPSK) first header symbols followed by 7552
5 Quadrature Phase Shift Keyed (QPSK) first payload
6 symbols, followed by 16 QPSK flush symbols, followed
7 by 96 BPSK second header symbols, followed by 7552
8 QPSK second payload symbols, followed by 16 QPSK flush
9 symbols.

1 35. The method of claim 34, wherein transmitting
2 the first header comprises transmitting 114 guard band
3 symbols, 64 first pseudorandom noise synchronization
4 symbols, 32 first frame type symbols, 32 masterframe
5 count symbols, and 64 subframe count symbols, and
6 wherein transmitting the second header comprises
7 transmitting 64 second pseudorandom noise
8 synchronization symbols and 32 second frame type
9 symbols.

1 36. The method of claim 35, wherein transmitting
2 the first and second payload symbols comprises
3 transmitting first and second payload symbols

DOWNLINK BEAM HOPPING WAVEFORM

ABSTRACT

A frame signal (100) for communicating payloads (104, 110) of data includes a first payload field (104) and a first header field (102) with a first frame type indicator (120). The frame signal (100) also includes a second payload field (110) and a second header field (108) smaller than the first header field (102) that includes a second frame type indicator (128). The first payload field (104), first header field (102), second payload field (110), and the second header field (108) are encapsulated in a single frame (100) to provide multiple payload delivery with reduced overhead compared to individually transmitted single payload frames.

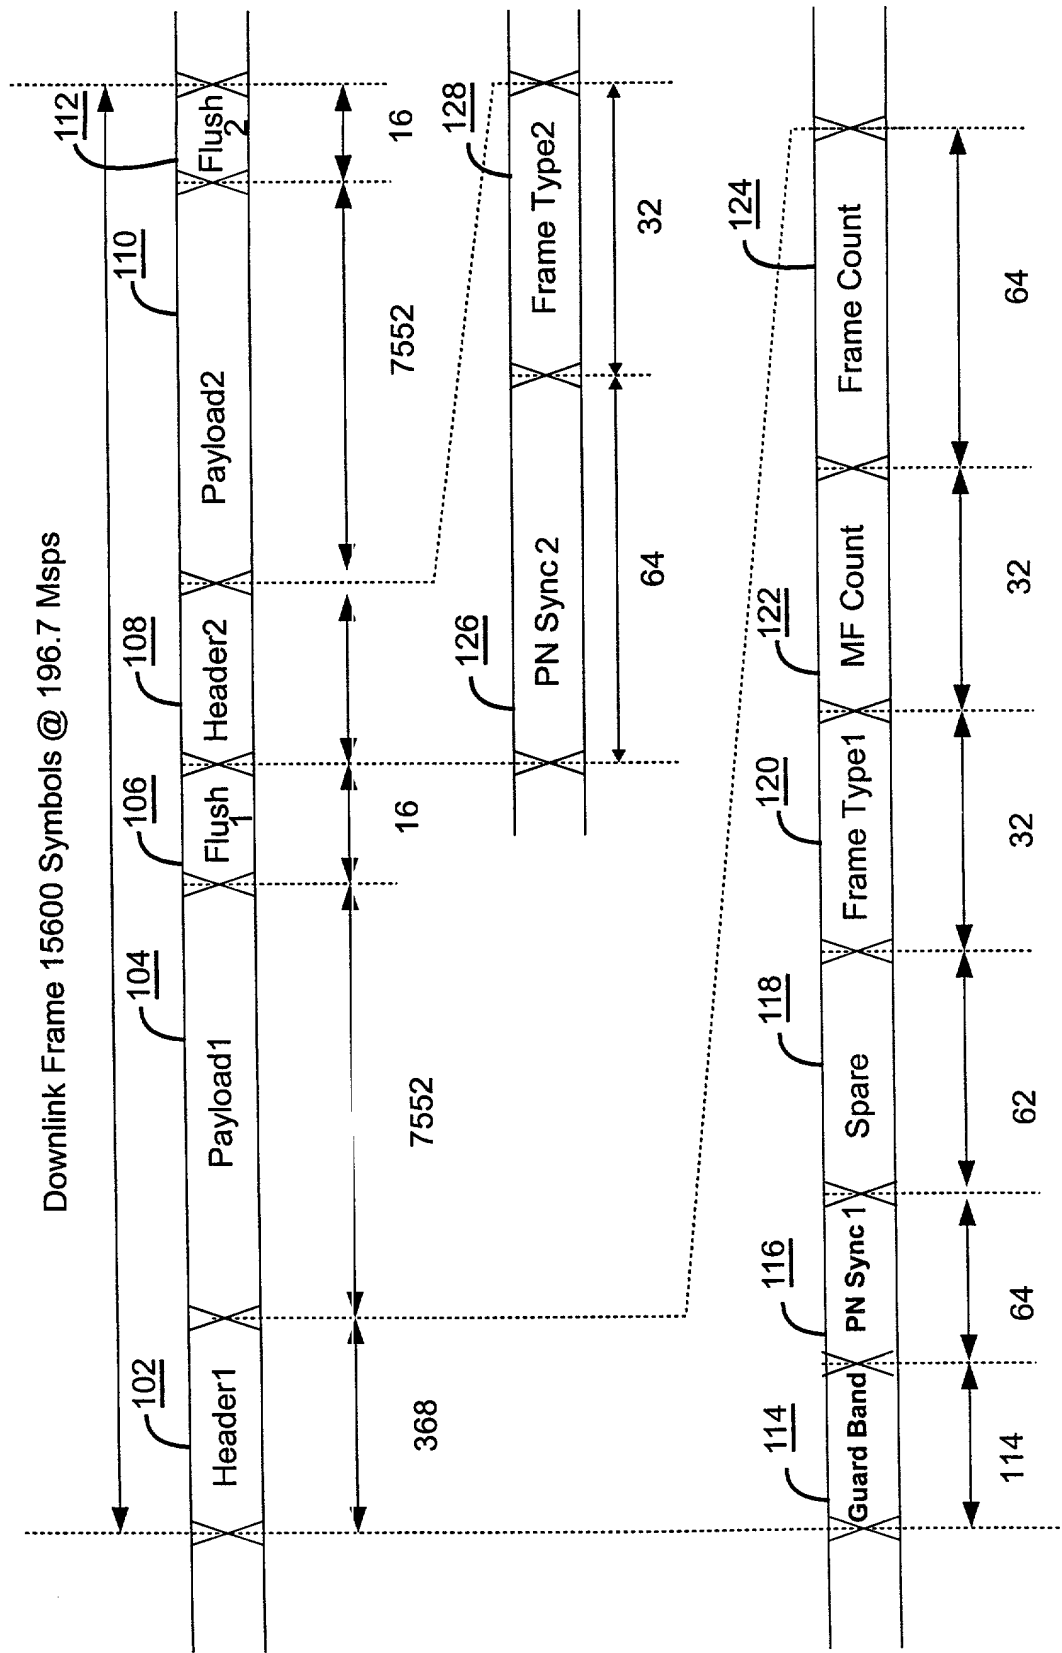


Figure 1

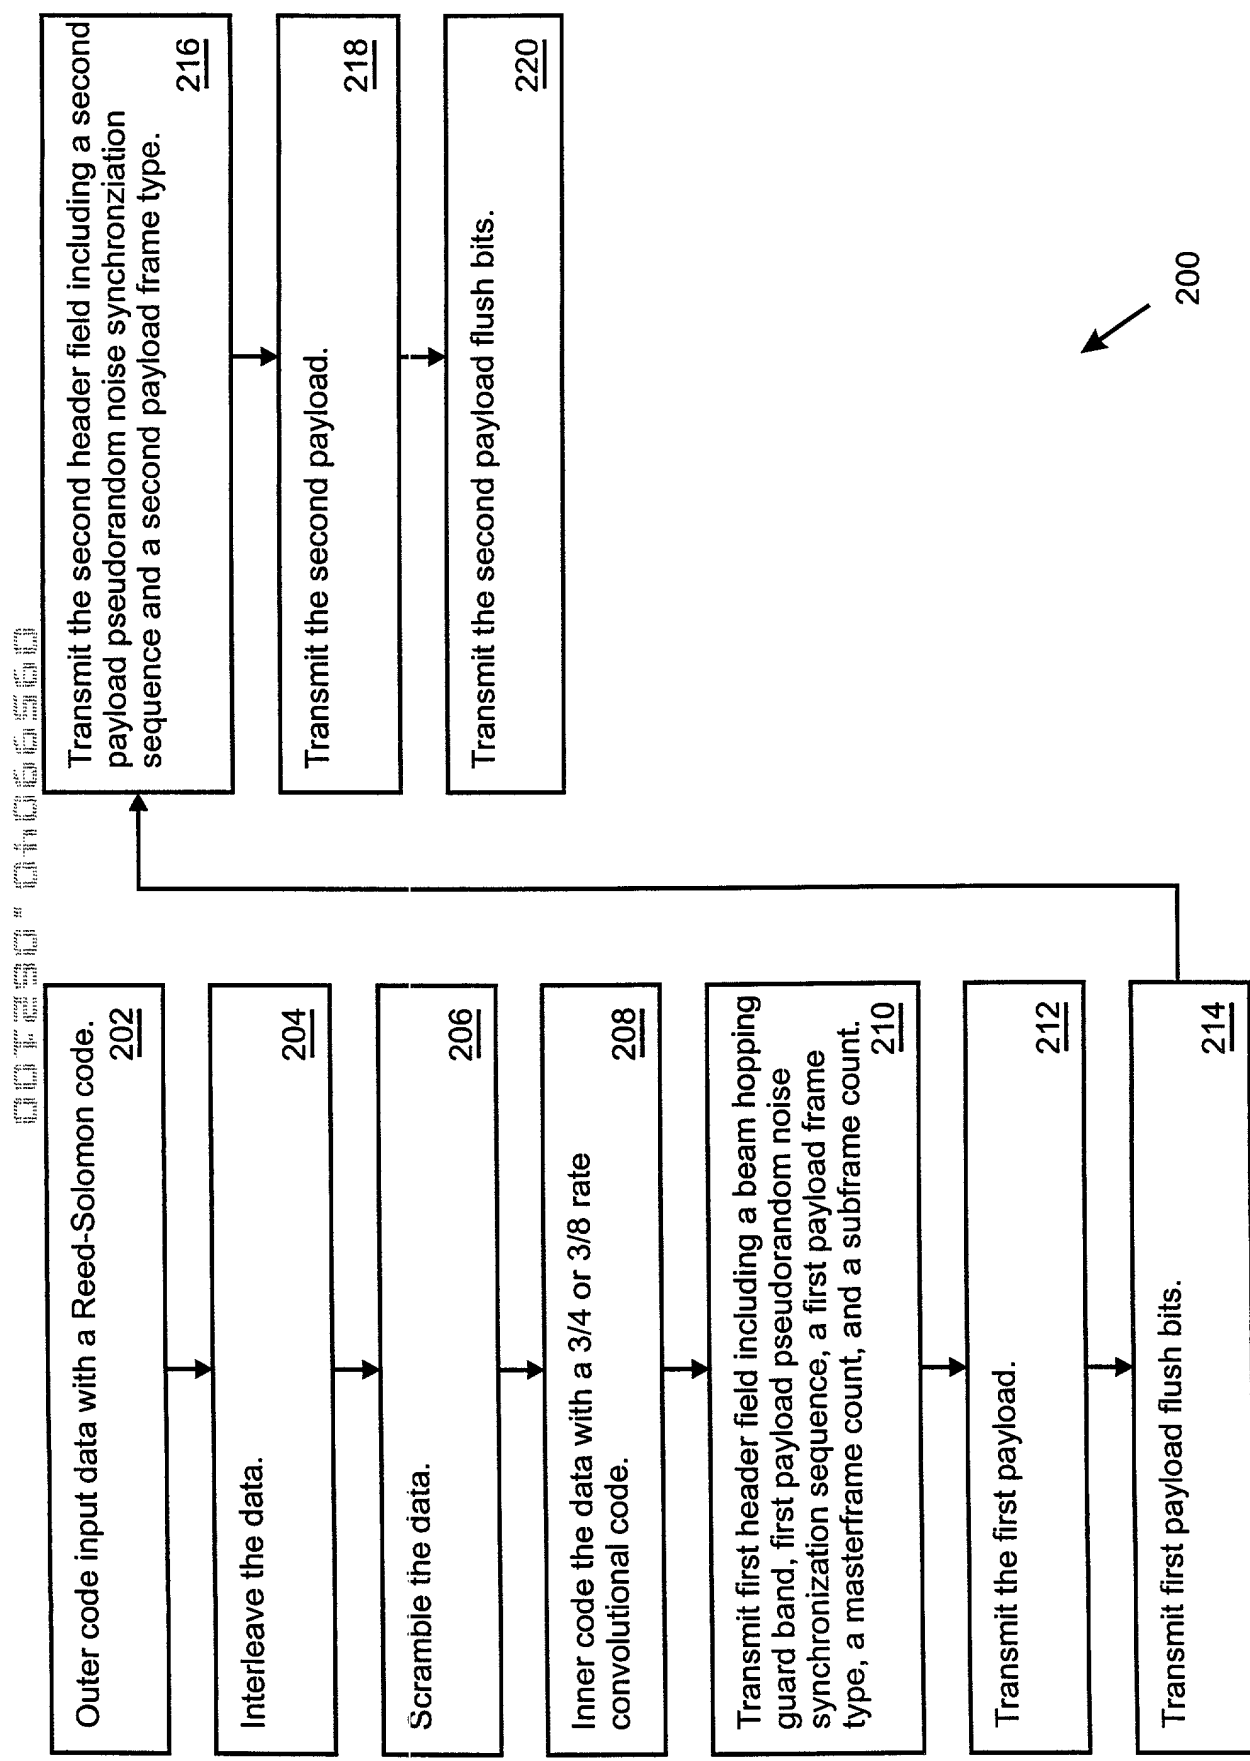


Figure 2

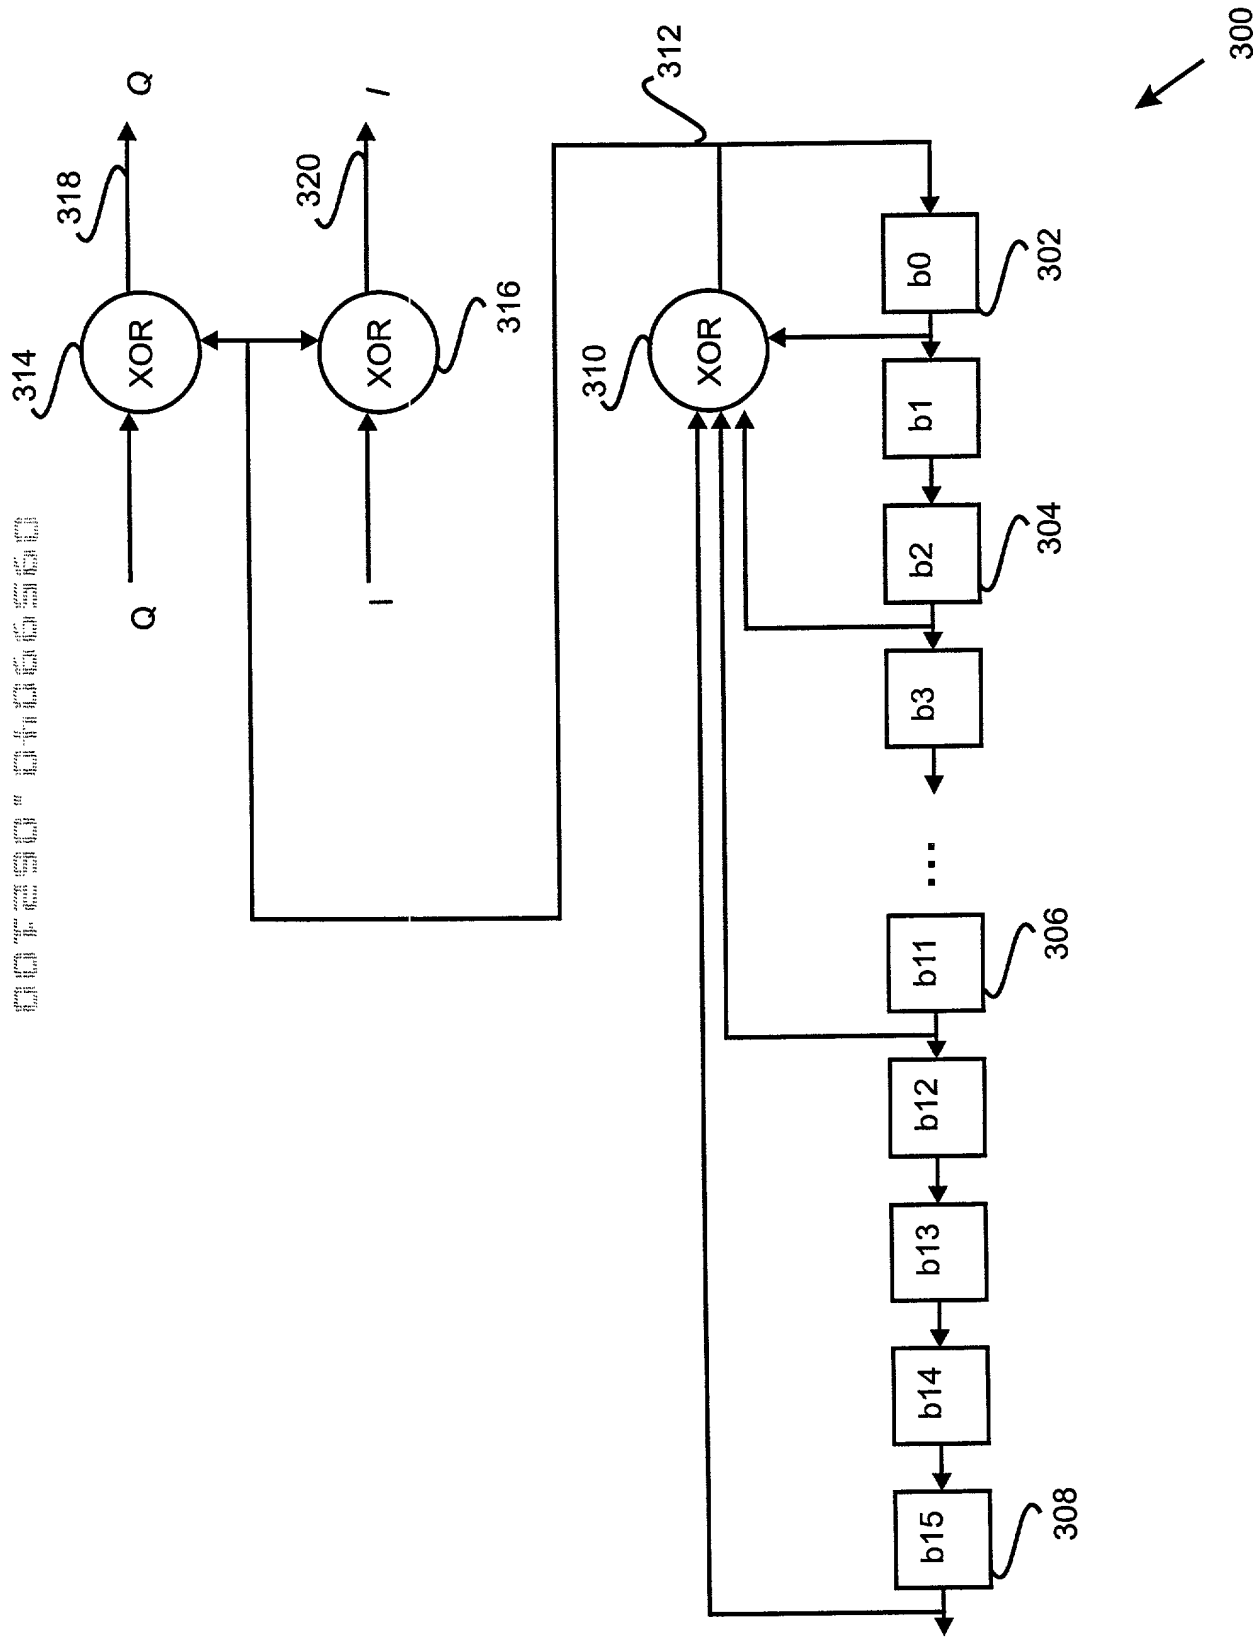


Figure 3

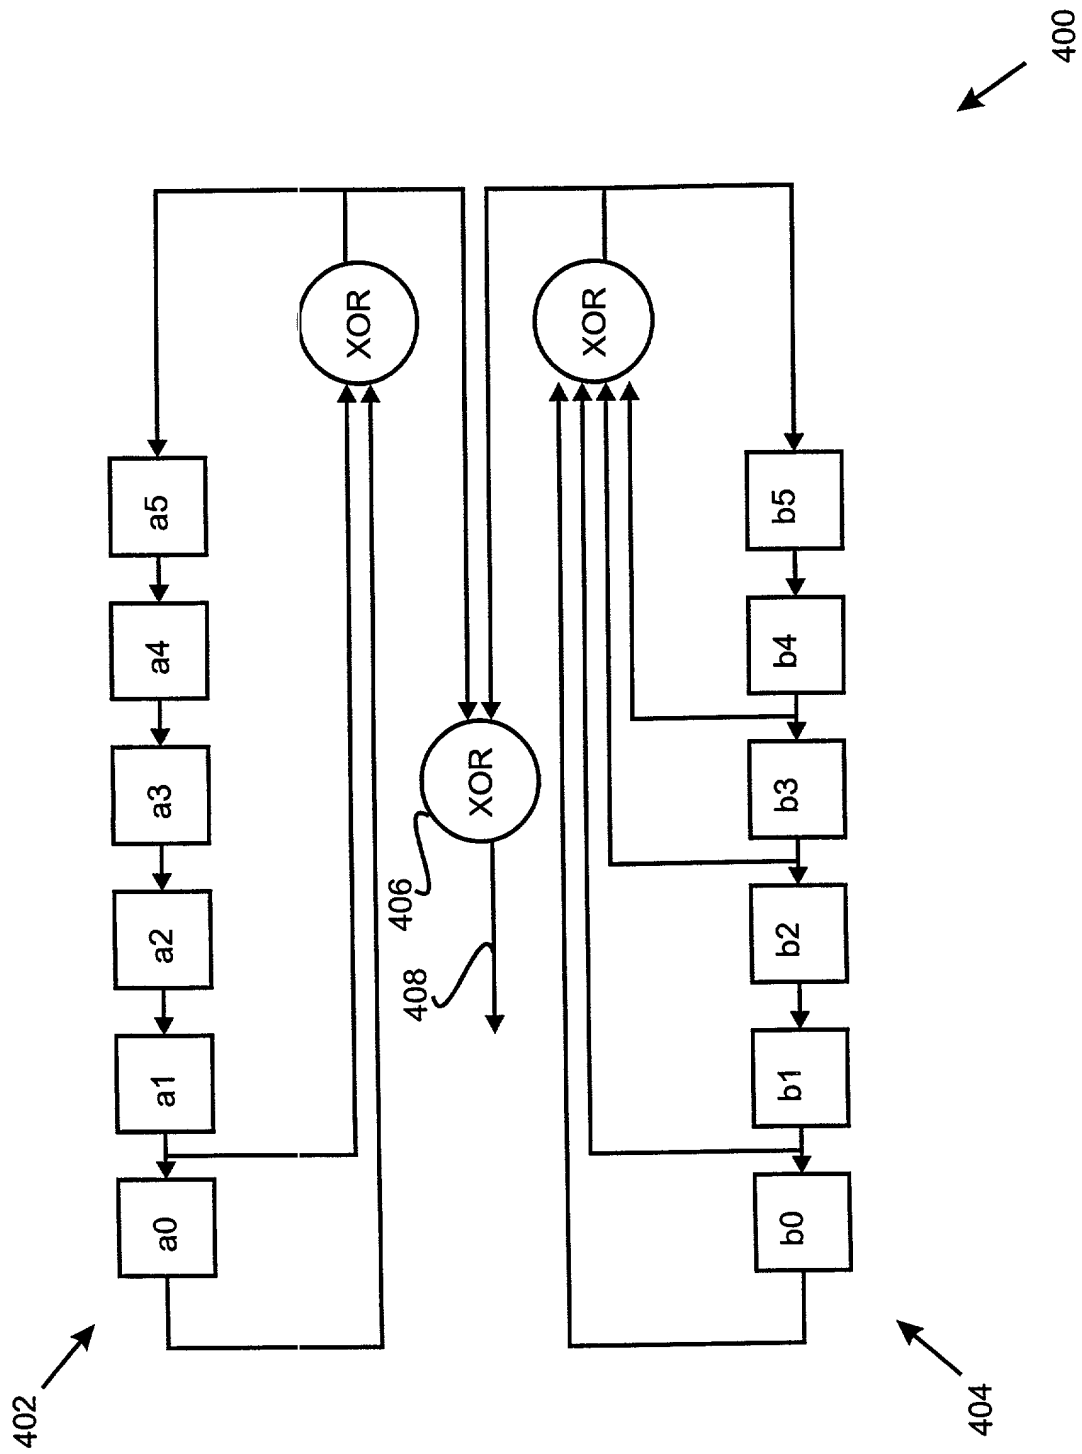


Figure 4

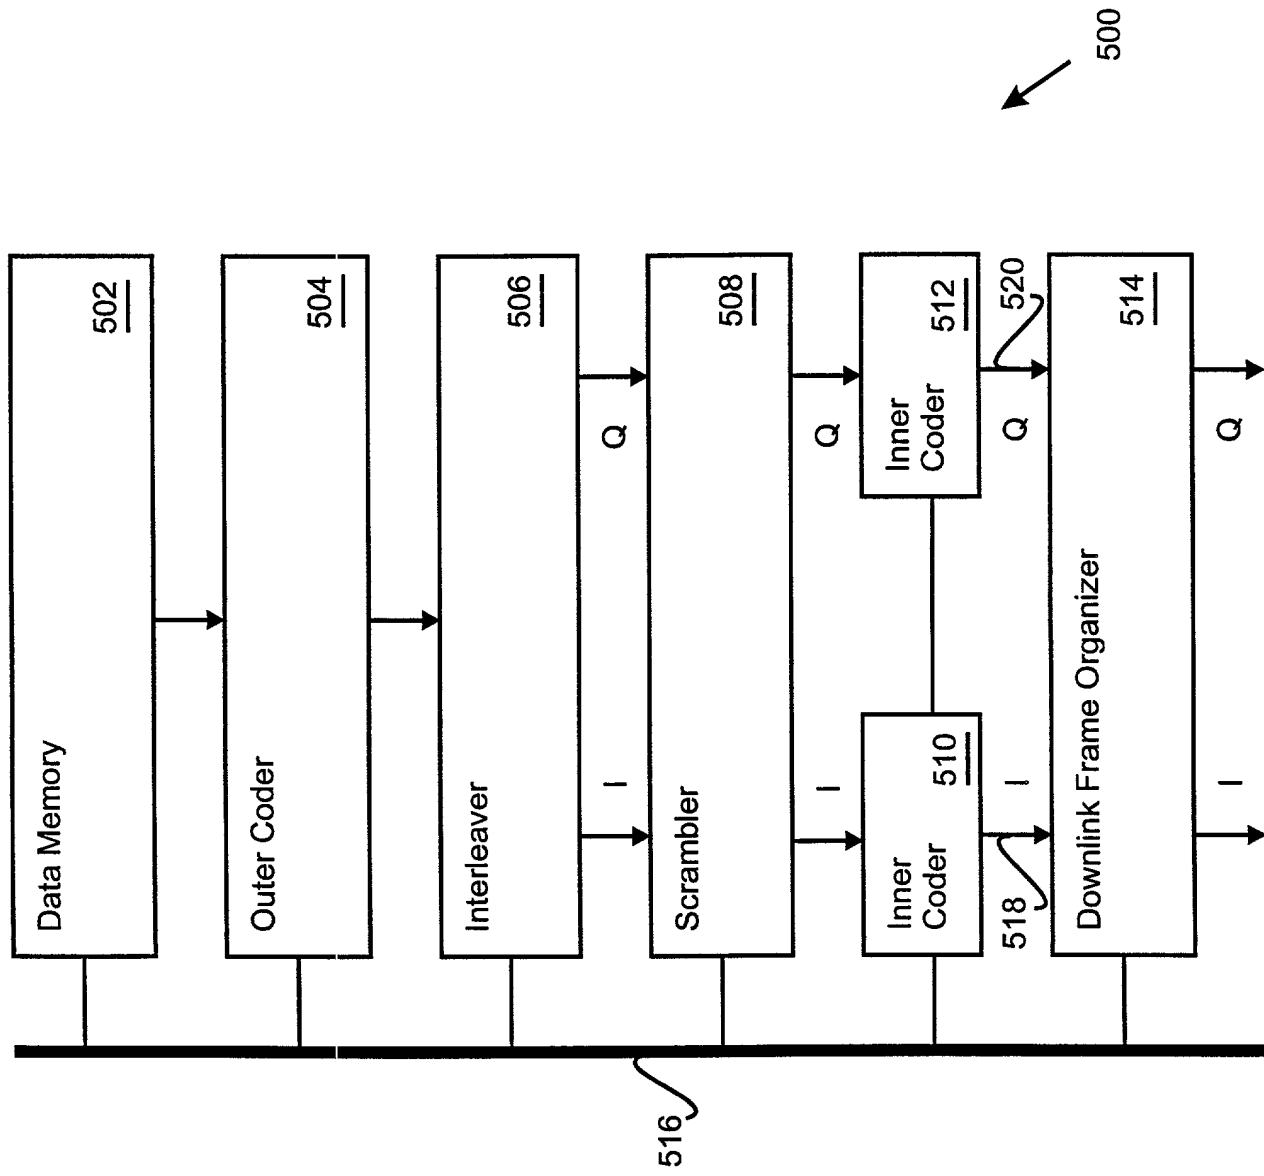


Figure 5

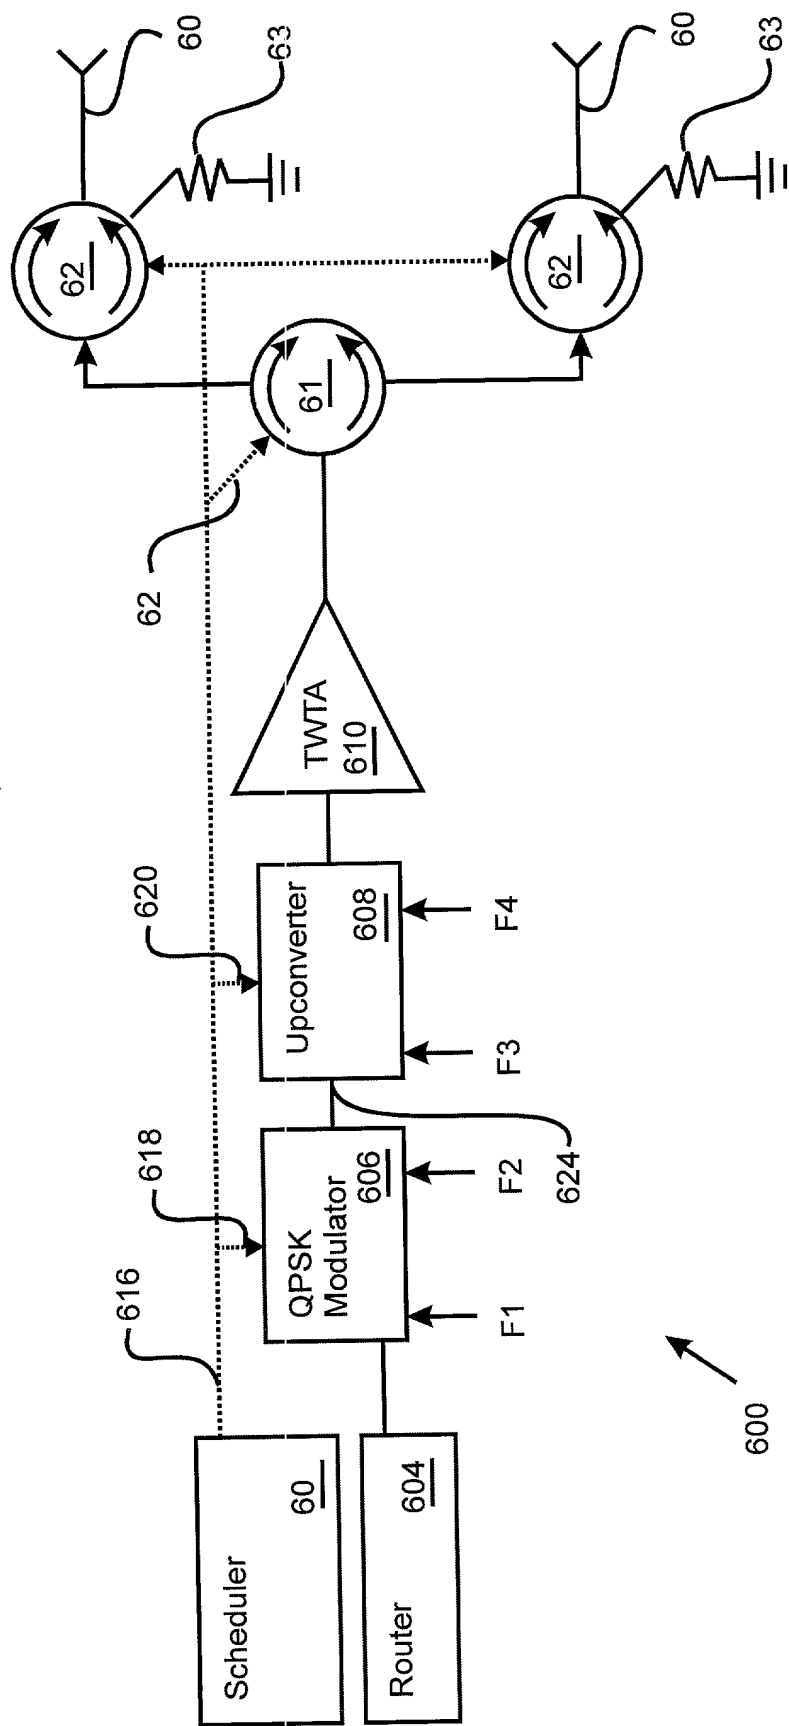


Figure 6

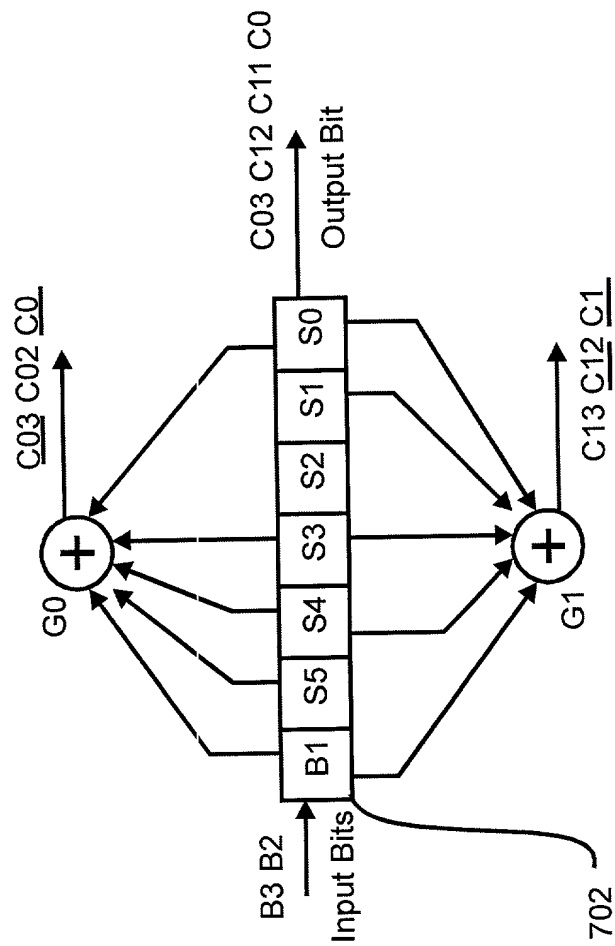


Figure 7

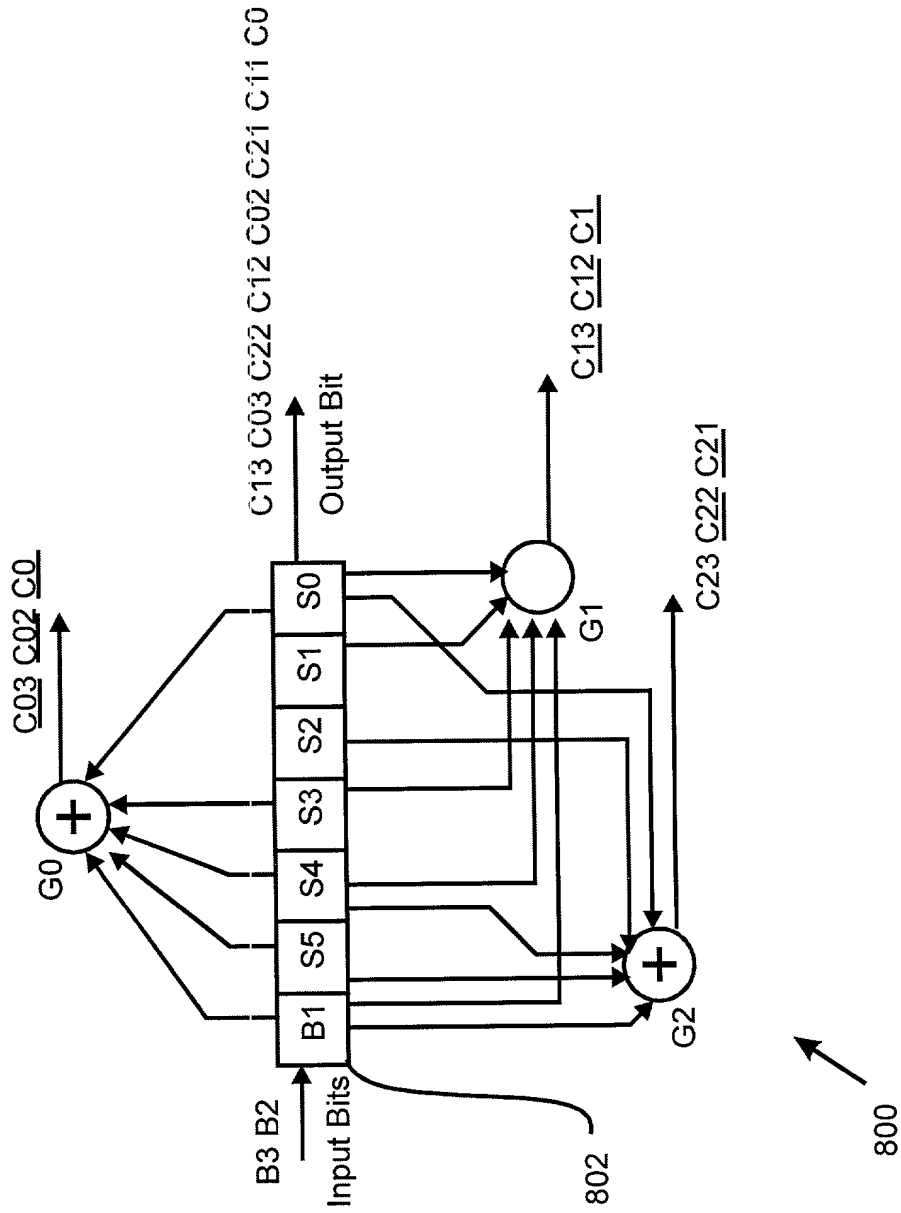


Figure 8

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DOWNLINK BEAM HOPPING WAVEFORM the specification of which

_____ is attached hereto

_____ was filed on _____ as Application Serial
No. _____ and was amended on
_____.
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>NONE</u>				
(Number)	(Country)	(Day/Mo./Yr. Filed)	Yes	No

Docket No. 22-0125

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>NONE</u> (Number)	<u> </u> (Country)	<u> </u> (Day/Mo./Yr. Filed)	<u> </u> (Status)
-------------------------	--	--	---

I hereby appoint as principal attorneys:

Robert W. Keller, Reg. No. 25,347
Michael S. Yatsko, Reg. No. 28,135
Connie M. Thousand, Reg. No. 43,191
William M. Wesley, Reg. No. 26,521

each with full power to prosecute this application, to transact all business in the United States Patent and Trademark Office connected therewith, and to appoint and revoke associate and substitute associate attorneys.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Address all telephone calls to: (310) 812-4910

Address all correspondence to: PATENT COUNSEL
TRW Inc.
Space & Electronics Group
One Space Park, E2/6051
Redondo Beach, California 90278

Docket No. 22-0125

Full name of first inventor Scott A. Cooper

Inventor's signature _____ Date: _____

Residence Torrance, California

Citizenship United States

Post Office Address 23227 Robert Road, Torrance, California 90505

Full name of second inventor Reginald (NMI) Jue

Inventor's signature _____ Date: _____

Residence Manhattan Beach, California

Citizenship United States

Post Office Address 2317 Elm Avenue, Manhattan Beach, California 90266

Full name of third inventor Esmuell (NMI) Yousefi

Inventor's signature _____ Date: _____

Residence Manhattan Beach, California

Citizenship United States

Post Office Address 740 12th Street, #A, Manhattan Beach, California 90266

Full name of fourth inventor David A. Wright

Inventor's signature _____ Date: _____

Residence Hermosa Beach, California

Citizenship United States

Post Office Address 1118 Tenth Street, Hermosa Beach, California 90254

Full name of fifth inventor Stuart T. Linsky

Inventor's signature _____ Date: _____

Residence San Pedro, California

Citizenship United States

Post Office Address 1070 Santa Cruz Street, San Pedro, California 90732

Docket No. 22-0125

Full name of sixth inventor Mark E. Bever

Inventor's signature _____ Date: _____

Residence Redondo Beach, California

Citizenship United States

Post Office Address 208 Vista del Parque, Redondo Beach, California 90278

03/04/2023 04:06:00